

Note

1. The electric circuit diagram and parameters on the product nameplate are final ones if they have been changed.
2. The design might be improved without notice.



WARNING:

Refrigerant is flammable (R290), please protect against fire.



Meaning of crossed out wheeled dustbin:

Do not dispose of electrical appliances as unsorted municipal waste, use separate collection facilities.

Contact your local government for information regarding the collection systems available.

If electrical appliances are disposed of in landfills or dumps, hazardous substances can leak into the groundwater and get into the food chain, damaging your health and well-being.

When replacing old appliances with new ones, the retailer is legally obligated to take back your old appliance for disposal at least free of charge.

UK

Access to professional repair, such as internet webpages, addresses, contact details.

Model no: DC402BB


Aftersales service station list:

Address	Linåvej 20 . 8600 Silkeborg . Denmark	QR code	
Contact Number	0045 7242 5571		
Website	www.scandomestic.dk		
Relevant information for ordering spare parts, directly or through other channels provided by the manufacturer, importer or authorised representative;		www.scandomestic.dk	
The minimum period during which spare parts, necessary for the repair of the appliance, are available; (years)		8	
defined in Regulation EU 2019/2018 by means of a weblink that links to the model information as stored in the product database or a link to the product database and information on how to find the model identifier on the product.)		www.scandomestic.dk	

Note: The address or contact phone number of the service site is subject to change without prior notice. Please confirm whether the service station is a directly affiliated one of our company when requiring services.

REFRIGERATOR

OPERATION INSTRUCTIONS

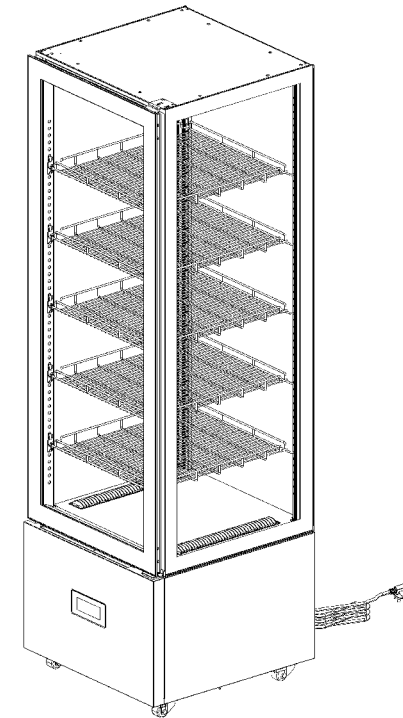

Thank you for choosing and purchasing our product. Please carefully read the operation instructions before use for a correct application and satisfactory effect.

This appliance compliance with the requirement of directive 2006/42/EC.

Contents


- 2) General
- 2) Structure and Parts
- 3) Handling and Placement
- 4) Set up and Power
- 5) Usage instructions
- 6) Safety Warnings
- 7) Maintenance
- 8) Trouble Shooting
- 9) Refrigeration System and Circuit diagram
- 10) Technical Specifications

Major Parameters


Parameter	DC402BB
Coolant and injection quantity(g)	R290(90)
General Rated input power(W)	380
Rated current(A)	2
Refrigeration temperature(°C)	2-10
Electric shock protection class	I
Type of climate	4
Total effective volume(L)	402
Net weight(kg)	110
Rated voltage(V~)	220-240
Rated Frequency(Hz)	50
Overall dimension (mm) (LxWxH)	597.5x590x1900
Lamp Power(W)	4(LED)

Principle of Refrigeration System and Electric Circuit Diagram

The principle of compression refrigeration consists of “compression” , “condensation” , “throttling” and “vaporization” . The compression is undertaken by compressor, the condensation is completed by condenser, the throttling valve is executed by capillary and the vaporization is implemented by evaporator. When the coolant is circulating in the closed refrigeration system, the compressor sucks coolant, which has absorbs heat in evaporator, the coolant becomes a high pressure and high temperature gas. In condenser, it dissipates heat in air, while the coolant is re-liquefied and throttled in capillary and then enters into evaporator with low pressure. The liquefied coolant quickly boils and vaporizes into gas when the pressure suddenly drops. Meanwhile, it absorbs heat inside the refrigerator. And the compressor sucks the low pressure and low temperature gaseous coolant,It is circulating in this way up to realization of intended refrigeration.

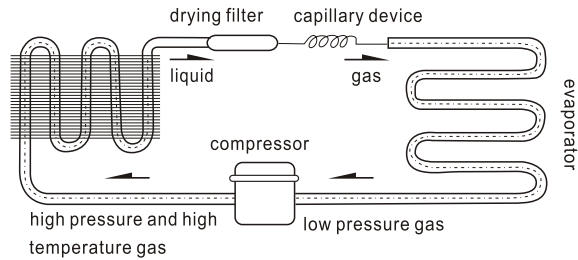


Circuit Diagram

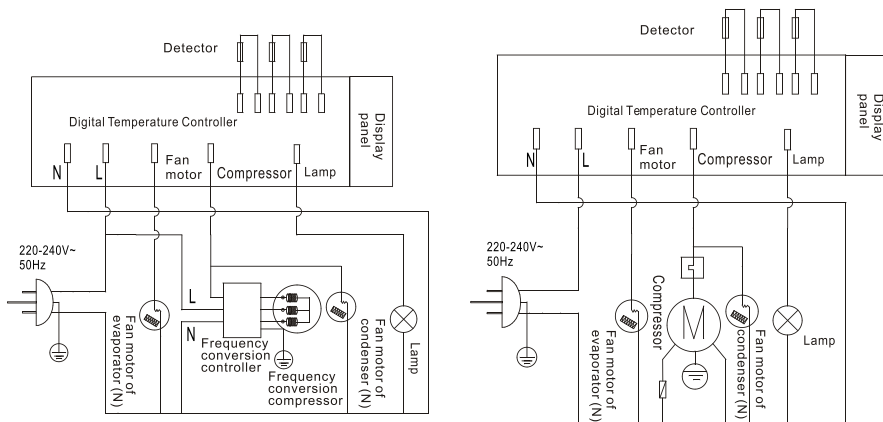









General

1. A high quality, fully enclosed compressor is used in this product and utilises the R290 refrigerant which is an environmentally friendly gas. A forced air refrigeration system is used which ensures that the temperature is very even throughout the case.
2. Glazing is used throughout the product for maximum visibility and two rear mounted sliding doors allow easy access.
3. The horizontal showcase has a wide range of uses including convenience stores, bakery outlets and other food service establishments as well as offices and even homes.
4. Always allow a time of around 2 hours between moving the unit and restarting it.

Structure and Parts

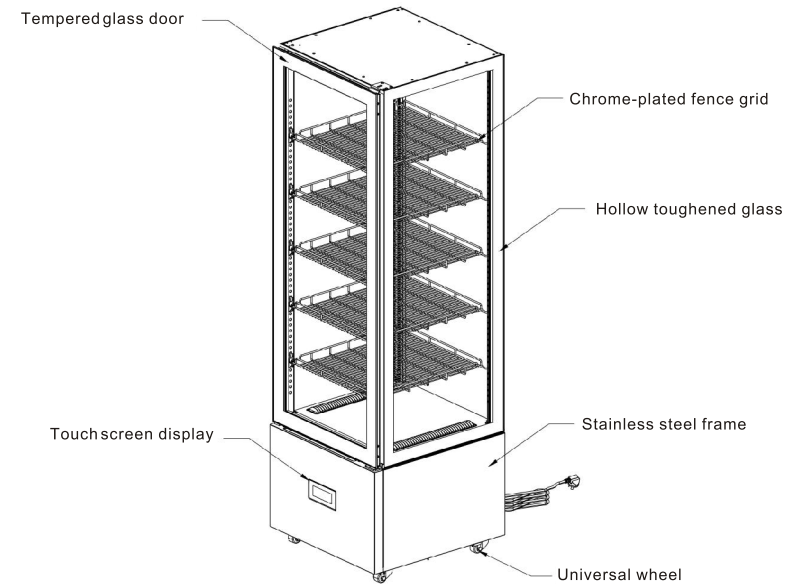

Handle and Erection

<p>Handle with care Unplug the wall socket first. Never tilt it over 45 degree during handling.</p> 	<p>Dry place Always locate the refrigerator at a dry place.</p> 
<p>Sufficient space The distance from both sides and back of refrigerator to wall or other substance must be less than 10cm. The refrigeration capability might be decreased if its surround space is too small to circulate air.</p> 	<p>Well ventilation Always locate the refrigerator at a place with fine ventilation. For the first time use, wait for 2 hours after handling and then plug the wall socket and start it.</p> 
<p>Far from heat source Never place the refrigerator directly under the sunshine. Never locate it nearby any heat source or heater to prevent it from reducing refrigeration capability.</p> 	<p>No heavy load Never put any heavy load on the top of the refrigerator.</p> 
<p>No hole making Never make hole on the refrigerator. Never install other matter on the refrigerator.</p> 	<p>Stable location To avoid the unexpected noise and vibration, Unpacking and locate the refrigerator on a flat and solid place.</p> 

Trouble Shooting

Problem	Cause	Remedy
No refrigeration	Is the plug in the socket correctly?	Check the plug
	Is the fuse broken?	Check fuse and replace if needed
	Is there no power from the socket?	Plug another unit into the socket to check if it works
Unsatisfactory Refrigeration	Is it in direct sunlight or near a heat source?	Move away from the heat source
	Is the surrounding area bad for ventilation?	move to an area with improved ventilation
	Does the door close correctly? Is the door left open?	Check the door
	Is the unit too full?	Remove some food
Unit is making irregular noise	Is the temperature controller correct?	Check the controller
	The fridge is not sitting level	Move to a flat surface
	The fridge is vibrating off something else	Move the unit so it is not touching anything
	There is a loose part in the refrigerator	Check the interior for loose items
Contact the manufacturer for help if simple trouble shooting does not solve the problems		

Note

The following occurrences are not problems

The noise of water is heard when the fridge is working, this is a natural occurrence as the coolant is circulating the system.

Condensation may be found on the outside of the fridge. This is not a problem, it is caused by humidity, simply use a cloth to wipe it.

Children should be supervised to ensure that they do not play with the appliance
 The operation manual are not suitable for the persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge.

Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance.

During normal operation, the emission noise level does not exceed 70dB(A).

The maximum loading of the Shelf does not exceed 18kg.

The climatic class of the appliance is 4, the Units are suggested to be used at 16°C-32°C ambient temperature.

To avoid damages or other problems, this product can not be put or stored with any corrosive food.

WARNING! Keep ventilation openings clear of obstruction at all times.

WARNING! Do not use mechanical devices or any other means of accelerated defrosting unless recommended by the manufacturer.

WARNING! Do not damage or modify the refrigeration circuit.

WARNING! Do not use electrical appliances inside the food storage areas unless they are recommended by the manufacturer.

Maintenance

1. Notice

Always unplug the unit before performing any form of maintenance

Clean the fridge regularly using a clean, damp cloth. Do not use cleaning detergents such as soap, acetone or gasoline

2. Clean Outside

Dip a soft cloth in a mild detergent (washing up liquid) to clean the outside, and then wipe off with a dry soft cloth.

3. Clean Inside

Remove the tray and clean with water

Use a soft, damp cloth to wipe the interior

4. Turning off for prolonged periods

Take out all food and unplug the unit from the wall.

Clean both the inside and outside of the fridge thoroughly and open the door to allow it to dry.

Be careful as the glass can easily be broken.

5. Replacement of the light


If the LED is damaged it must be replaced by the manufacturer or their service agent.

Setup and Power

Exclusive power socket
 Normally, the power supply should be 220-240V, 50Hz single phase AC with exclusive single phase three pin receptacle.



Common Sockets
 Never use a multiple plug extension lead for this product



Protect the cables
 Never break, damage, cut or otherwise modify the power cables as this can lead to fire and electrocution



Keep away from Water
 Never flush the refrigerator with water, only use a clean, damp cloth to wipe it down.



Flammables and explosives
 Keep all flammable and explosive substances away from the fridge as the heat generated by the compressor could cause a fire.



Flammable Spray
 Never spray or clean the unit with a flammable spray.



Power Cut
 After a power cut or unit shut down please allow at least 4 minutes before plugging in the unit and re-starting it again.



Not Suitable for Medicine
 This refrigerator is not suitable for the storage of medicinal products.



Usage Instructions

1. Before use:

Plug the fridge in to an exclusive 220-240V~ socket

Once the fridge has been running place your hand on the air extractor to confirm that it is sufficiently cold once you are happy then you may put food inside.

2. Digital temperature controller:



Construction instructions:

This parts consist of display panel and main control board, using serial port signal line for data communication.

1.1 Display panel instructions

1.2 Icon instructions

1.2.1 “❄️” : Defrosting icon: lighting off - none; flickering - advance refrigeration before defrosting; lighting on - is defrosting.

1.2.2 “❄️” : Compressor icon: lighting off - the compress is not working, lighting on - the compressor is working.

1.2.3 “💡” : LED light indicator.

1.2.4 “🌀” : Fan motor working status indicator.

1.2.5 “☀️” : Heating element working indicator (no such function).

1.2.6 “👉” : Flickering - cleaning function is working (no such function).

1.2.7 “🕒” : Energy saving status indicator (no such function).

1.2.8 “🔒” : Locking status indicator.

2. Operation instructions:

2.1 Power ON/OFF instructions

2.1.1 Power on the system: press “🔌” button and hold on, the system will be power on after 1s, showing current temperature; If the temperature is within compressor start working range, the compressor will set time to delay starting according to the setting value of internal parameter "E4".

2.1.2 Under power on condition: press “🔌” button and hold on, the system will be turned off after 1s; After that, “🔌” button and “❄️” button will flickering successively at an interval of 1s, it means buttons are valid.

2.1.3 When pressing button correctly, the buzzer will beep, and below is similar.

2.2 Temperature setting

2.2.1 Under power on condition, press “❄️” button and start to set temperature, “SET” icon and the data on display are flickering, press

“⬆️” or “⬇️” to increase or decrease the temperature at 0.5°C each time.

2.2.2 If press “⬆️” or “⬇️” button and hold it on, after 1s, the temperature setting value will be added or reduced by 0.5°C every 0.1s.

Temperature setting range: within the value range of internal parameter E1~E2. Factory default value: sets according to device type.

2.2.3 If no press after 5s or press again “❄️” within 5s when setting, it will exit the temperature setting, and shows normal display, the set value will be stored in battery-free memory.

2.3 Lamp operation

2.3.1 Under power on condition, press “💡” button shortly, will turn ON/OFF the LED light, and the “💡” icon will lighting on/off accordingly.

2.3.2 LED light status will be stored in battery-free memory.

2.4 Locking/Unlocking operations

2.4.1 Under power on and unlocking status, press “⬇️” button long, the “🔒” icon will lighting on after 5s, it means the system enters into locking status, in this case all other buttons are invalid except “❄️” and “🔌” button.

2.4.2 Under locking status, press “⬆️” button long, and it will unlock after 5s, the “🔒” icon will be lighting off.

2.4.3 Locking/Unlocking status, will be stored in battery-free memory.

2.5 Defrost manually operation

2.5.1 Under normal working status, press “❄️” button and hold on for 5S, it enters into defrosting manually mode, the “❄️” icon will be lighting on.

2.5.2 Under defrosting, press “❄️” button long, it will exit the defrosting mode.

2.6 One-button reset operation

2.6.1 Under normal working status, press “⬆️” and “⬇️” button together, the buzzer will beep after 6s, indicating all parameters will return to factory default value, the display is flickering and indicate current temperature for 3s, then return to normal display

Safety Warnings

When opening the door try to reduce the length of time that it is open for in order to keep the temperature inside cold.

Do not overload the unit with food as it will affect the cooling ability.

Always cool hot food down to room temperature before placing it in the fridge.

The unit should only be maintained by a professional engineer.

Never touch the compressor as it may be hot and burn you.

If the power cord is damaged it must be replaced by the manufacturer or a professional engineer.

Children should be supervised at all times to ensure they are not hurt by the unit.

This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.